

Cutting width and cutting speed with one touch operation at will!



Touch panel control system & Easy disassemble Belts



Adjustment of cutting width and speed is possible with anyone with superior operability of liquid crystal

Because the tool work is unnecessary, the efficiency of the working hour largely improves.

Cutting maximum number of revolutions improves 30% conventionally

Setting of the cutting width is 0.2 mm- 90 mm



The intermittent movement of the belt by computer control



**タッチ操作一つで
切断幅や裁断スピードを
自由自在に調整できます**

200 II High Speed Cutter

350 II High Speed Cutter

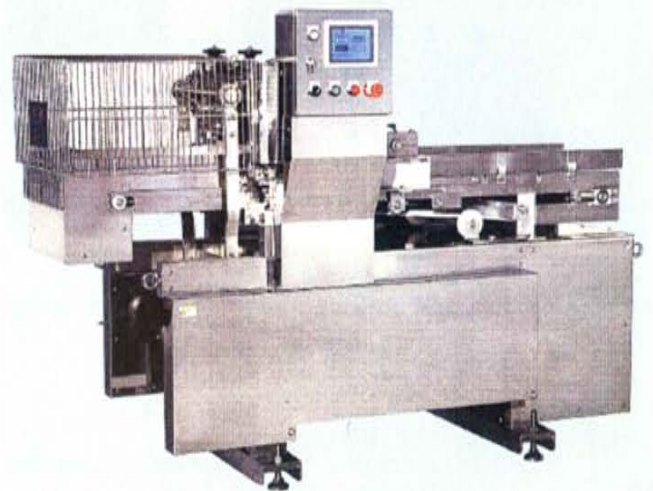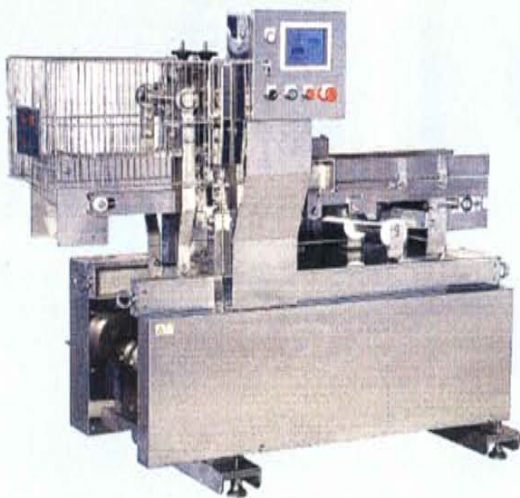


Power	3 Phases Motor	Size	Height ...1415mm
	1.5kw×1台 0.4kw×1台		Width ...775mm
Weight	375kg		Length ...1550mm


Power	3 Phases Motor	Size	Height ...1420mm
	1.5kw×1台 0.75kw×1台		Width ...805mm
Weight	500kg		Length ...1955mm

Monitoring various kinds of Setting!


Menu Monitor

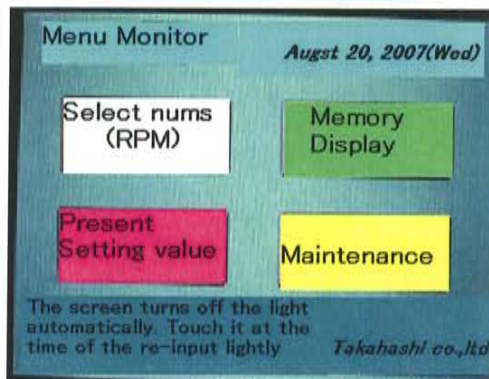


Cutting Numbers

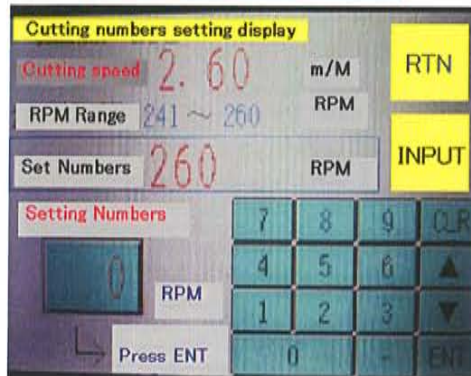


Cutting Nums Select 1

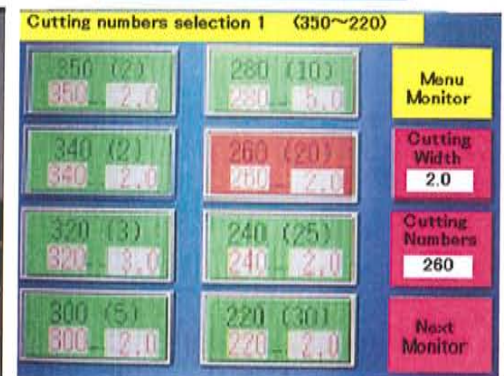

Cutting Nums Select 2

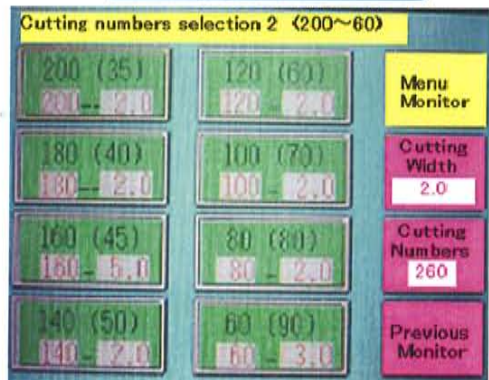


Setting Cutting Width

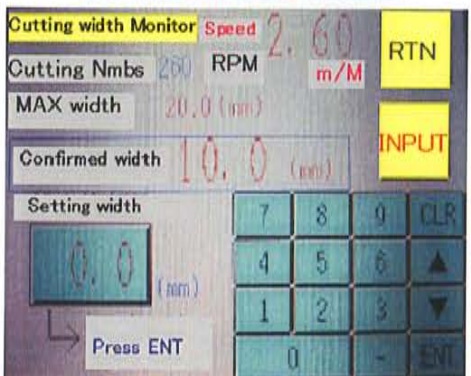

Monitor Display




Maintenance

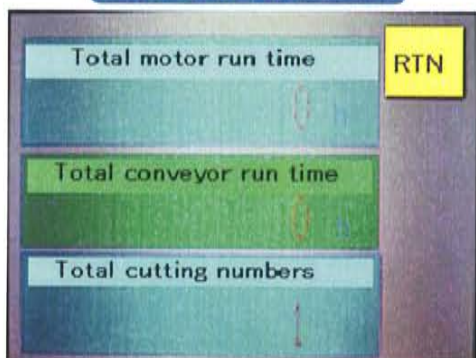

Safety Check



Emergency

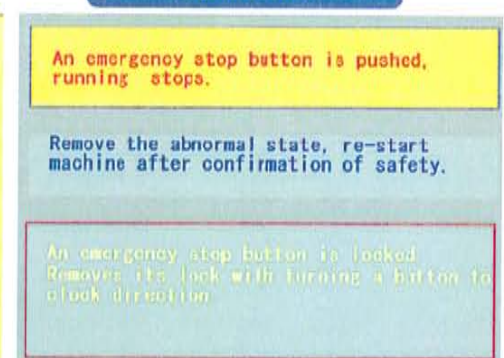

株式会社 **タカハシ**
Food Machine Takahashi co., LTD.

■本 社 〒167-0022 東京都杉並区下井草3-17-7
TEL 03-3396-7772(代) FAX 03-3396-6678

Various setting is possible depending on a demand.